

ROBEL E³ BATTERY



HIGH-PERFORMANCE BATTERY TECHNOLOGY MEETS RELIABLE ENGINEERING.

ECONOMIC

- Profitability
- Productivity
- Reliability
- Low Maintenance

ECOLOGIC

- Innovation
- Sustainability
- Energy Efficiency
- Carbon Neutrality

ERGONOMIC

- User-Friendliness
- Safety
- Emission Reduction
- HAV-Reduction

ROBATTERY 71.01 (400 Wh)



43 V

ROBATTERY 71.01 (800 Wh)



ADAPTER 71.02



Clean,
quiet,
powerful.

RODRILL 10.20 E³
Battery Powered Rail Drill



ROBORE 11.20 E³
Battery Powered Tie Drill




ROSAW 12.20MSB E³
Battery Powered Rail Band Saw




ROMPACT 30.20 E³
Battery Powered Impact Wrench



ROSPIKE 33.25 E³
Battery Powered Spike Driver

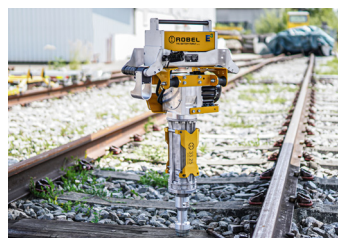

ROTAMP 62.20L E³
Battery Powered Tie Tamper

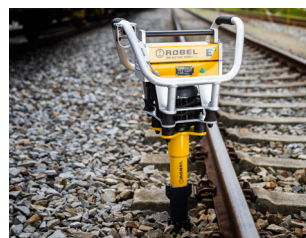

ROPOWER 76.20 E³
Battery Powered Hydraulic Pump



ROBATTERY 71.02 (2300 Wh)

50 V



ROGRIND 13.45MD E³
Battery Powered Profile Grinder



ROGRIND 13.49 E³
Battery Powered Zero Point Profile Grinder



ROCUT 13.90 E³
Battery Powered 16" Rail Saw



ROGRIND 13.63
Battery Powered Modular Switch Grinder



ROWRENCH 30.76 E³
Battery Powered Precision Power Wrench



ROWRENCH 30.82HKS E³
Battery Powered Power Wrench



ROCLIP 34.01 E³
Battery Powered Fast-Clip Machine



ROCLIP 34.02
Battery Powered Modular Fast-Clip and E-Clip Machine



ROCONVERT 72.01 E³
Battery Conversion Kit



**Our contribution
to climate
protection
and health
and safety.**

HONOR THE PAST. FORGE THE FUTURE.



BATTERIES BUILT BY THE RAILROAD, FOR THE RAILROAD.

ROBEL WILL SAFELY TAKE BACK YOUR USED BATTERIES AND RESPONSIBLY RECYCLE THEM, ENSURING THEY'RE HANDLED WITH CARE EVERY STEP OF THE WAY.



SPECIFICATION	ROBATTERY 71.01	ROBATTERY 71.01	ROBATTERY 71.02
Energy Content	400 Wh	800 Wh	2,300 Wh
Capacity	9 Ah	18 Ah	46 Ah
Rated Voltage	43 V	43 V	50 V
Charging Time	2 - 3 h	3 - 4 h	6 - 8 h
Dimensions	13 x 5.5 x 4.5"	13 x 5.5 x 6"	18 x 14.5 x 4"
Total Weight	8.5 lbs	14 lbs	35.5 lbs

ROBATTERY 71.01 (400 Wh)




ROBATTERY 71.01 (800 Wh)



ROBATTERY 71.02 (2300 Wh)



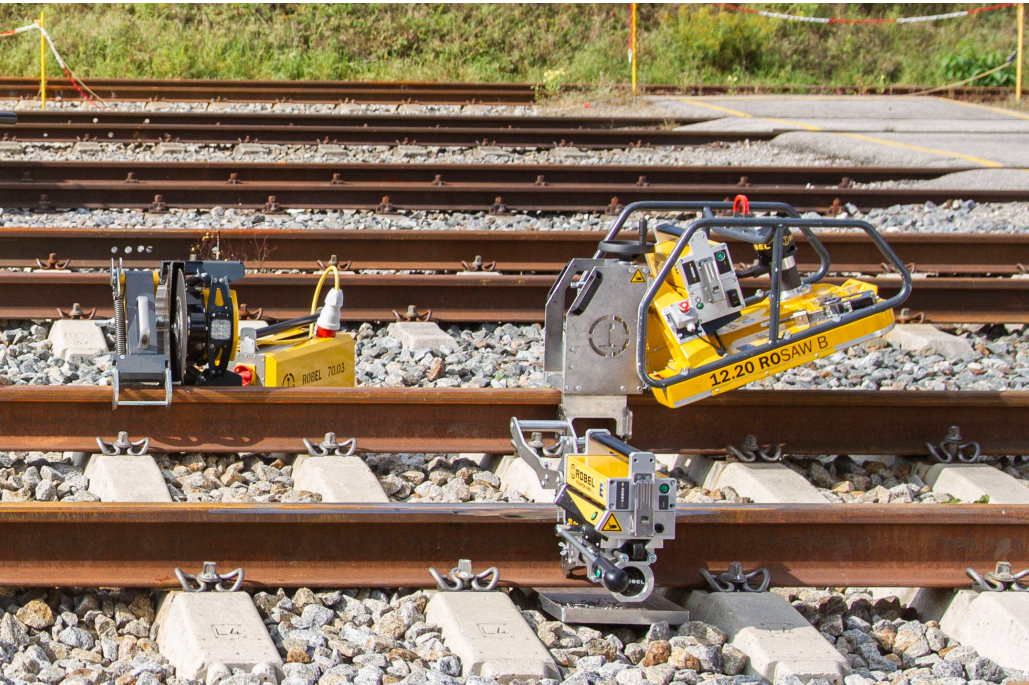

ENVIRONMENTAL CONDITIONS:

I Service Temperature

-4 to 104 °F

I Storage Temperature

-4 to 122 °F

ROBEL Batteries will not charge when the charging level is at 75% or higher, to protect the longevity of the battery

SPECIFICATION	ROCHARGER 71.11	ROCHARGER 71.12
Battery Charger	400 / 800 Wh	2,300 Wh
Output	300 W	360 W
Charge Termination Voltage	50.5 V	59 V
Input Voltage	100 - 240 V	100 - 240 V
Dimensions	13.5 x 8 x 5.5"	8.5 x 3.5 x 2"
Weight	7.5 lbs	5 lbs

ROCHARGER 71.11



ROCHARGER 71.12

