

# ROWRENCH 30.82HKS UNIVERSAL POWER WRENCH

## BENEFITS

- Electronic torque measurement at the screw spindle with folding, height-adjustable handles for ergonomic use
- Torque gauge display
- LED work light
- Safety kill switch
- Long service life due to ROBEL high-performance clutch



For tightening and  
loosening lag screws.

## SPECIFICATIONS


■ <b>Drive</b>	4-cycle engine	4-cycle engine
■ <b>Type</b>	Honda GX 200	Honda GX 270
■ <b>Output</b>	4.3 kW at 3,600 rpm	6.3 kW at 3,600 rpm
■ <b>Dimensions (L x W x H)</b>	75 x 23.5 x 31.5"	77 x 23.5 x 31.5"
■ <b>Weight</b>	205 lbs	231.5 lbs

\*Torque Specifications Upon Request

# ROWRENCH 30.82HKS CONFIGURATIONS

- 1. Choice of Drives (see above)**
- 2. Choice of Height-Adjustable Guide Handles (see previous page)**

**a. For Depressing on Right-Hand Side Only**

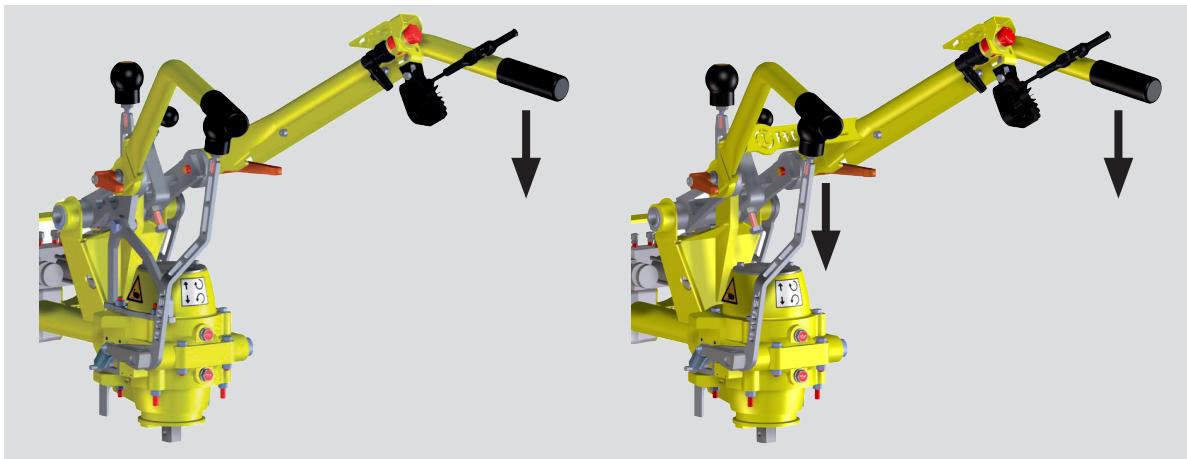

**b. For Depressing on Both Sides**



## ACCESSORIES

### Fish Bolt Spanner (for joint bars) – 31.82

8003182001

### Clip Bolt Removal Socket

8328950130 for K-Type Track



### Travelling Gear with Rubber Wheels

8320820001 For Working in Areas with Slab Track

### Cover

9000100065 Maximum Weather Protection

### Torque Meter

8869900006 Torque Meter 86.12+ to Calibrate the Machine

7738960001 Universally Adjustable Transport Frame (30.73, 30.82RKS, 30.83, 34.01)



### \* Contact ROBEL for Custom Application Configurations

As standard, the ROWRENCH supplied in North America includes the 56.5" transverse gear and a 1" drive extension. For additional information or to discuss specific application configurations tailored to your needs, contact ROBEL today. Our team is here to help you find the perfect solution for your unique requirements.